


Installation Instructions:

1. Turn power off.
2. Line voltage must be the same as indicated on label of control.
3. Locate control in such a way that no artificial light will cause the control to turn off at night. If light from the controlled lamp falls on cell, the control will cycle (turn on and off).
4. Place gaskets on threaded nipple. Insert nipple through hole in the enclosure. Screw on nut, tight enough to make a weatherproof seal. If the enclosure surface is curved or uneven, apply silicone rubber sealing compound between enclosure hole and nipple to make a weatherproof seal.
IMPORTANT: THE BODY OF THIS CONTROL MUST BE LOCATED IN A WEATHERPROOF ENCLOSURE. ONLY THE LENS AND THREADED NIPPLE ARE WATERTIGHT.
5. Wiring Procedure:
 - a) Connect black wire (hot line) to black wire of control.
 - b) Connect all black wires from fixtures to red wire of control.
 - c) 120V Units: Connect all white wires from fixtures and white wire from control to neutral wire.
208-277V Units: Connect all white wires from fixtures and yellow wire from control to common wire (red line)
6. Turn power on.
7. Lamp should turn off in less than 2 minutes, if control is tested in day time. If control is tested at night, use a flashlight and shine on cell. Lamp should turn off in less than 2 minutes. Lamp will come on 2 minutes or less after removal of flashlight.
NOTE: THIS PHOTOCONTROL HAS A TIME DELAY WHEN TURNING ON OR OFF, TO PREVENT ACCIDENTAL OPERATION FROM MOMENTARY BRIGHTNESS (CAR LIGHTS, LIGHTNING, ETC.)


Mode D'Installation

1. Coupez le courant.
2. La tension doit correspondre à celle figure sur l'étiquette de la photocellule.
3. Placez la photocellule de façon qu'aucune lumière artificielle ne la fasse s'arrêter pendant la nuit. Si la lumière de la lampe à laquelle la photocellule est branchée éclaire la cellule, le cycle de la photocellule se déclenchera (marche et arrêt).
4. Placez le joint sur le raccord fileté. Faites passer le raccord dans le trou du boîtier. Serrez l'écrou suffisamment pour obtenir un joint étanche.
IMPORTANT: LE CORPS DE CETTE PHOTOCELLULE DOIT ÊTRE PLACÉ DANS UN BOÎTIER ÉTANCHE. SEUKS KA ENTILLE ET LE RACCORD FILETÉ SONT ÉTANCHES.
5. Méthode de câblage.
 - a) Branchez le fil noir (ligne directe) au fil noir de la photocellule.
 - b) Branchez tous les fils noirs des appareils au fil rouge de la photocellule.
 - c) Appareil 120 & 277V: Joindre tous les fils blancs des appareils et le fil blanc de photocellule au fil neutre du secteur.
Appareil 208 & 240V: Joindre tous les fils blancs des appareils et le fil jaune de photocellule au fil commun (fil rouge).
6. Remettez le courant.
7. Cette lampe devrait s'éteindre dans moins de 2 minutes si la photocellule est testée pendant la journée. Si la photocellule est testée la nuit, servez-vous d'une lampe électrique de poche pour éclairer la cellule. La lampe s'allumera 2 minutes ou moins après l'extinction de la lampe électrique.
NOTE: CETTE PHOTOCELLULE FONCTIONNE À RETARDÉMENT (ARRÊT ET ALLUMAGE) POUR ÉVITER SON DÉCLENCHÉMENT, ACCIDENTEL EN CAS DE LUMINOSITÉ PROVISOIRE (PHARE DE VOITURES, ÉCLAIRS, ETC.)

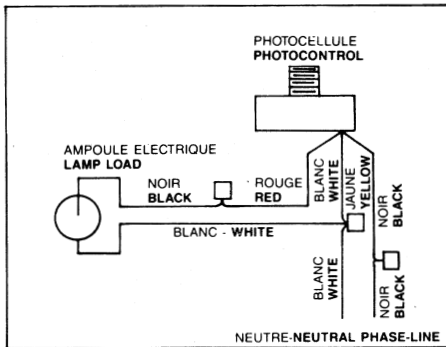

120V & 277V

SCHEMA DE CABLAGE
WIRING DIAGRAM

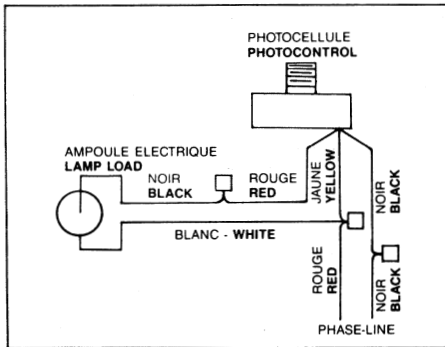

208V & 240V

SCHEMA DE CABLAGE
WIRING DIAGRAM

P **PARAGON**
Electrical Products

Maple Chase Company

2820 Thatcher Road
Downers Grove, Illinois 60515
Telephone + 1 800 732 8400
ISO 9002 registered

IN CANADA:

Paragon Electric Canada Ltd.
5785 Kennedy Road
Mississauga, Ontario L4Z 2G3
905/890-5956



A Siebe Group Company

110-745B